



40-55 WATT MEDICAL SWITCHING POWER SUPPLIES

DESCRIPTION

The PMP55 series of AC/DC switching power supplies are for 40 to 55 watts of continuous output power. They are enclosed in a 94V-1 rated polyphenylene-oxide case with an IEC 320 inlet to mate with interchangeable cord for world-wide use. An on/off switch can be added at request. All models meet CISPR 11 and FCC class B emission limits, and are designed for medical applications, not for life support equipment.

FEATURES

- 15 standard desktop models
- Single, dual or triple outputs
- Optional output connectors
- Optional on/off switch
- 100% burn-in
- Wide input range 85 to 264VAC
- Input surge current protection
- Overvoltage protection
- Overcurrent protection
- Compliant with RoHS requirements

INPUT SPECIFICATIONS

Input voltage : 85 to 264VAC
 Input frequency : 47 to 63Hz
 Input current : 1.50A (rms) for 115VAC
 0.90A (rms) for 230VAC
 Earth leakage current : 90uA max. @ 115VAC, 60Hz
 150uA max. @ 230VAC, 50Hz

OUTPUT SPECIFICATIONS

Output voltage/current : See rating chart
 Total output power : 55 watts maximum
 Ripple and noise : 1% peak to peak maximum
 Overvoltage protection : Provided on output #1 only; set at 112-132% of its nominal output voltage
 Overcurrent protection : All outputs protected to short circuit conditions
 Temperature coefficient : All outputs $\pm 0.04\%$ / $^{\circ}\text{C}$ maximum
 Transient response : Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500us after a 25% step load change

ENVIRONMENTAL SPECIFICATIONS

Operating temperature : 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$
 Storage temperature : -40 $^{\circ}\text{C}$ to +85 $^{\circ}\text{C}$
 Relative humidity : 5% to 95% non-condensing
 Derating : Derate from 100% at +50 $^{\circ}\text{C}$ linearly to 50% at +70 $^{\circ}\text{C}$

PMP55 SERIES



Safety Standard Approvals :



UL 2601-1, CSA C22.2 NO. 601.1
 File NO. E178020



TÜV EN60601-1
 Certificate No. T9954943

GENERAL SPECIFICATIONS

Switching frequency : 40KHz $\pm 5\text{KHz}$
 Efficiency : 70% minimum on single output models with $V_o \geq 10\text{V}$, 65% minimum on the others
 Hold-up time : 10 msec minimum at 110VAC
 Line regulation : $\pm 0.5\%$ maximum at full load
 Inrush current : 15 amps @ 115VAC or 30 amps @ 30VAC, at 25 $^{\circ}\text{C}$ cold start
 Withstand voltage : 4000VAC from input to output
 1500VAC from input to ground
 500VAC from output to ground
 MTBF : 450,000 hours minimum at full load at 25 $^{\circ}\text{C}$ ambient , calculated per MIL-HDBK-217F
 EMC Performance (EN60601-1-2: 2001)
 EN55011: Class B conducted, Class B radiated
 FCC: Class B conducted, Class B radiated
 VCCI: Class B conducted, Class B radiated
 EN61000-3-2: Harmonic distortion , Class A
 EN61000-3-3: Line flicker
 EN61000-4-2: ESD, $\pm 8\text{KV}$ air and $\pm 6\text{KV}$ contact
 EN61000-4-3: Radiated immunity, 3V/m for 80~2500MHz
 EN61000-4-4: Fast transient/burst, $\pm 2\text{KV}$
 EN61000-4-5: Surge, $\pm 1\text{KV}$ diff., $\pm 2\text{KV}$ com.
 EN61000-4-6: Conducted immunity, 3Vrms
 EN61000-4-8: Magnetic field immunity, 3A/m
 EN61000-4-11: Voltage dips, 30% reduction for 500ms, 60% reduction for 100ms and >95% reduction for 10ms

UNIVERSAL INPUT


PMP55 MEDICAL SERIES

OUTPUT VOLTAGE/CURRENT RATING CHART

(1)(2) MODEL	Output #1				Output #2				Output #3				Maximum Output Power
	Vnom.	Imin.	I _{max}	Tol.	Vnom.	Imin.	I _{max}	Tol.	Vnom.	Imin.	I _{max}	Tol.	
PMP55-10	5-6V	0A	8.0A	5%	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	40W
PMP55-10-1	6-8V	0A	7.5A	5%	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	45W
PMP55-11	9-11V	0A	5.0A	5%	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	50W
PMP55-12	11-13V	0A	4.6A	5%	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	55W
PMP55-13	13-17V	0A	3.7A	3%	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	55W
PMP55-13-1	17-21V	0A	3.1A	3%	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	55W
PMP55-14	21-27V	0A	2.3A	3%	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	55W
PMP55-16	27-33V	0A	1.9A	3%	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	55W
PMP55-17	33-39V	0A	1.6A	3%	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	55W
PMP55-18	48V	0A	1.2A	3%	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	(N/A)	55W
PMP55-23	+5V	1A	5.0A	5%	+12V	0.5A	3.0A	5%	(N/A)	(N/A)	(N/A)	(N/A)	45W
PMP55-24	+5V	1A	5.0A	5%	+15V	0.4A	2.5A	5%	(N/A)	(N/A)	(N/A)	(N/A)	45W
PMP55-25	+5V	1A	5.0A	5%	+24V	0.3A	2.0A	5%	(N/A)	(N/A)	(N/A)	(N/A)	45W
PMP55-31	+5V	1A	5.0A	5%	+12V	0.5A	3.0A	5%	-12V	0.1A	0.5A	10%	45W
PMP55-32	+5V	1A	5.0A	5%	+15V	0.4A	2.5A	5%	-15V	0.1A	0.5A	10%	45W

- NOTES:
- The output voltage of a single output model, except PMP55-18, can be adjusted by user in the stated range, or set by factory to a wanted value in the range at the request of a user when ordering.
 - The output voltages of a multiple output model may go outside of the stated tolerance when an output load current is out of stated limits. All models may be operated at no-load without damage.

MECHANICAL SPECIFICATIONS

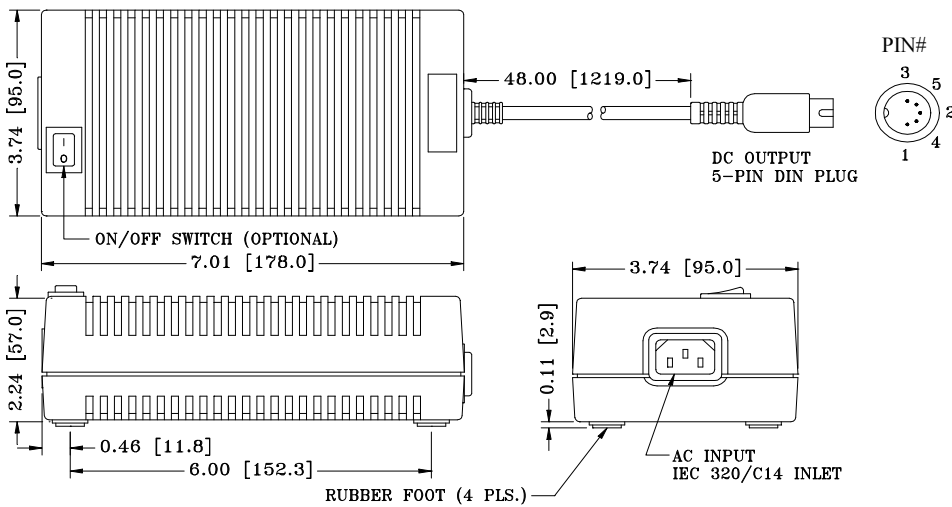

NOTES:

- Dimensions shown in inch [mm]
- Tolerance 0.02 [0.5] maximum
- Weight: 700 grams approx.
- See pages 6-9 to 6-18 for optional output connectors. Add the suffix assigned for a selected connector to a wanted model number, e.g. PMP55-10-B2, for ordering.
- To order a model with on/off switch, add suffix "S" to the model number, e.g. PMP55-10-B2-S.

PIN CHART

MODEL	PIN	1	2	3	4	5
PMP55-10 PMP55-11 PMP55-13 PMP55-14 PMP55-17	PMP55-10-1 PMP55-12 PMP55-13-1 PMP55-16 PMP55-18	RETURN	RETURN	OUTPUT #1	RETURN	OUTPUT #1
PMP55-23	PMP55-24 PMP55-25	COMMOM RETURN	COMMOM RETURN	OUTPUT #1	COMMOM RETURN	OUTPUT #2
PMP55-31	PMP55-32	COMMOM RETURN	COMMOM RETURN	OUTPUT #1	OUTPUT #3	OUTPUT #2